

**Product Specifications**

<b>Style Number</b>	VV023	
<b>Construction</b>	Waterproof Foamed Core	
<b>Edge Profile</b>	Micro Bevel	
<b>Nominal Dimensions</b>	5" wide, 48" long	
	<b>US Units</b>	<b>Metric Units</b>
<b>Actual Product Width</b>	4.96"	13 cm
<b>Actual Product Length</b>	48.03"	122 cm
<b>Wear Layer Thickness</b>	20 mil (0.02")	0.5 mm
<b>Overall Product Thickness</b>	0.314"	8 mm
<b>Core Thickness</b>	0.256"	6.5 mm
<b>Attached Underlayment</b>	Attached Cork	
<b>Attached Underlayment Thickness</b>	0.059"	1.5 mm
<b>Finish</b>	UV Acrylic	
<b>Installation Methods</b>	Floating or Direct Glue	
<b>Profile</b>	Angle/Tap	
<b>Country of Origin</b>	Imported	

**Packaging**

<b>Area per Box</b>	26.47 sq ft	2 sq m
<b>Pieces per Box</b>	16 pcs	
<b>Weight per Box</b>	44.09 lbs	19.99 kg
<b>Boxes per Pallet</b>	42 boxes	



201 Gold Coast Acacia

**Colors**

				
201 Gold Coast Acacia	202 Deep Smoked Oak	205 Northwoods Oak	206 Boardwalk Oak	207 Rocky Mountain Oak
Color Variation: V4 - Substantial	Color Variation: V3 - Moderate	Color Variation: V2 - Slight	Color Variation: V3 - Moderate	Color Variation: V3 - Moderate
				
501 Carolina Pine	503 Black Walnut	505 Norwegian Maple	506 Corvallis Pine	507 Dakota Walnut
Color Variation: V4 - Substantial	Color Variation: V1 - Uniform Appearance	Color Variation: V4 - Substantial	Color Variation: V2 - Slight	Color Variation: V4 - Substantial



COREtec Originals Classics VV023



The list of colors below complements the entire range of colors available for the current product.  
1 Test

Performance

Static Load (ASTM F970)	Passes
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

- USF Lifetime Limited
- Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof
- USF 10 Year Light Commercial
- Com Ub Bond 4100/4151


# COREtec Originals Classics VV023

## Certifications

FloorScore Certified

GreenGuard (Certification, Gold, Private Label) Certified

## Coordinating Trim

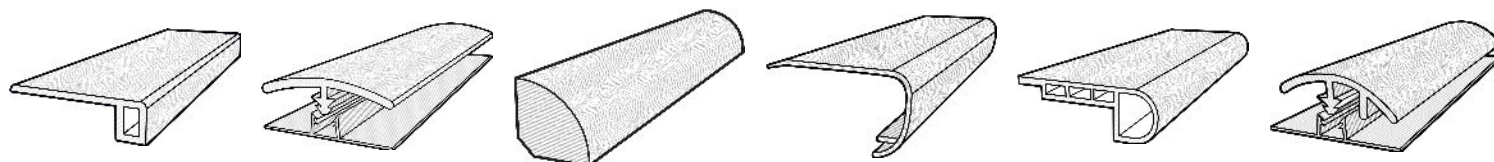

**Baby Threshold\***

BT7CT | 94"

01V02 | 94"

01V04 | 94"

**T-Molding\***

TM7CT | 94"

02V24 | 94"

02V26 | 94"

**Quarter Round**

QTRCT | 94"

01V27 | 94"

01V29 | 94"

**Overlap Stairnose\***

01V76 | 94"

01V78 | 94"

**Flush Stairnose**

FS7HU | 94"

02V01 | 94"

02V04 | 94"

**Overlap Reducer**

01V52 | 94"

01V54 | 94"

\*Packaged with molding track

## Coordinating Metal Trim



### Finish

Satin Silver

Satin Nickel

Dark Bronze

### Reducer

USC20

USC21

USC22

### T-Mold

USC23

USC24

USC25

### Stair Cap

USC17

USC18

USC19

## Installation Range

Profile Size	Installation Range
3.5mm	1.5mm to 3.5mm heights
5.5mm	3.6mm to 5.5mm heights
8mm	6mm to 8mm heights

## Stair Tread



**Stair Tread**

03Z70 | 48"

