


**Product Specifications**

<b>Style Number</b>	VV024	
<b>Construction</b>	Waterproof Foamed Core	
<b>Edge Profile</b>	Micro Bevel	
<b>Nominal Dimensions</b>	7" wide, 48" long	
	<b>US Units</b>	<b>Metric Units</b>
<b>Actual Product Width</b>	7.13"	18 cm
<b>Actual Product Length</b>	48.03"	122 cm
<b>Wear Layer Thickness</b>	20 mil (0.02")	0.5 mm
<b>Overall Product Thickness</b>	0.314"	8 mm
<b>Core Thickness</b>	0.256"	6.5 mm
<b>Attached Underlayment</b>	Attached Cork	
<b>Attached Underlayment Thickness</b>	0.059"	1.5 mm
<b>Finish</b>	UV Acrylic	
<b>Installation Methods</b>	Floating or Direct Glue	
<b>Profile</b>	Angle/Tap	
<b>Country of Origin</b>	Imported	

**Packaging**

<b>Area per Box</b>	38.03 sq ft	4 sq m
<b>Pieces per Box</b>	16 pcs	
<b>Weight per Box</b>	63.05 lbs	28.59 kg
<b>Boxes per Pallet</b>	35 boxes	

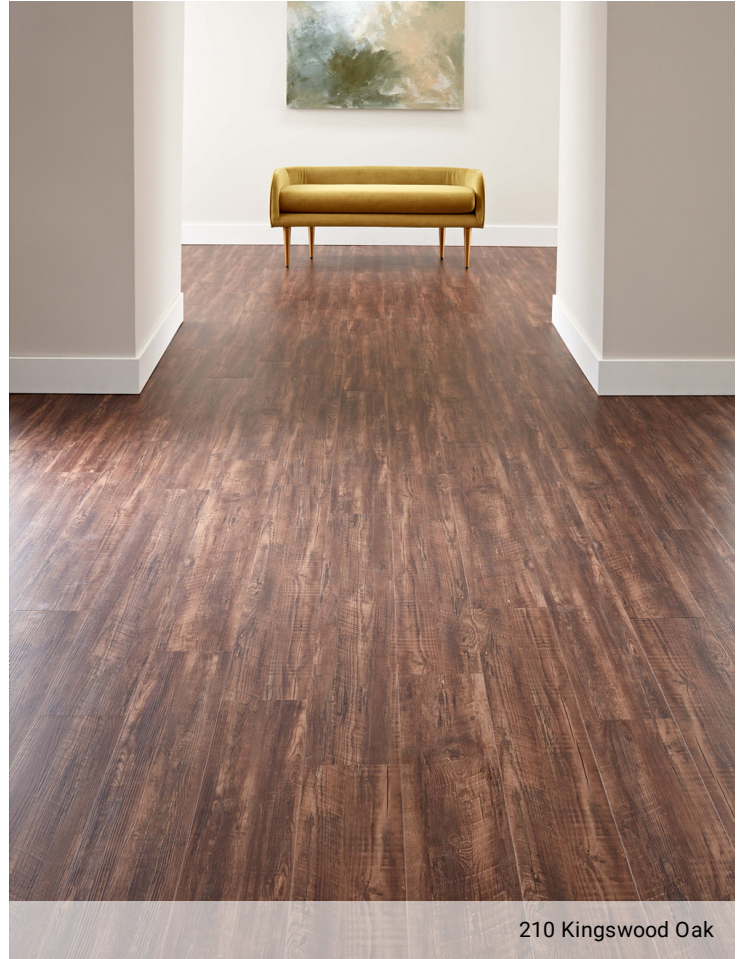

210 Kingswood Oak

**Colors**



# COREtec Originals Classics VV024



Color Variation: V2 - Slight

Color Variation: V2 - Slight



## Performance

<b>Static Load (ASTM F970)</b>	Passes
<b>Residual Indentation (ASTM F1914)</b>	Passes
<b>Resistance to Heat (ASTM F1514)</b>	Passes
<b>Resistance to Light (ASTM F1515)</b>	Passes
<b>Resistance to Chemicals (ASTM F925)</b>	Passes
<b>Radiant Panel (ASTM E648)</b>	Passes, Class I
<b>Slip Resistance (ASTM D2047)</b>	<a href="#">ADA compliant</a>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

USF Lifetime

[Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof](#)

10 Year Light Commercial

Com Ub Bond 4100/4151

## Certifications


FloorScore Certified

GreenGuard (Certification, Gold, Private Label) Certified




# COREtec Originals Classics VV024

## Coordinating Trim




**Baby Threshold\***

BT7CT | 94"  
01V02 | 94"  
01V06 | 94"




**T-Molding\***

TM7CT | 94"  
02V24 | 94"  
02V28 | 94"




**Quarter Round**

QTRCT | 94"  
01V27 | 94"  
01V31 | 94"




**Overlap Stairnose\***

01V76 | 94"  
01V80 | 94"



**Flush Stairnose**

FS7HU | 94"  
02V01 | 94"  
02V06 | 94"



**Overlap Reducer**

01V52 | 94"  
01V56 | 94"

\*Packaged with molding track

## Coordinating Metal Trim



**Reducer**

USC20  
USC21  
USC22



**T-Mold**

USC23  
USC24  
USC25



**Stair Cap**

USC17  
USC18  
USC19

**Finish**  
Satin Silver  
Satin Nickel  
Dark Bronze

## Installation Range

Profile Size	Installation Range
3.5mm	1.5mm to 3.5mm heights
5.5mm	3.6mm to 5.5mm heights
8mm	6mm to 8mm heights

## Stair Tread



**Stair Tread**

03Z70 | 48"