


## Product Specifications

<b>Style Number</b>	VV024	
<b>Construction</b>	Waterproof Foamed Core	
<b>Edge Profile</b>	Micro Bevel	
<b>Nominal Dimensions</b>	7" wide, 48" long	
	<b>US Units</b>	<b>Metric Units</b>
<b>Actual Product Width</b>	7.13"	18 cm
<b>Actual Product Length</b>	48.03"	122 cm
<b>Wear Layer Thickness</b>	20 mil (0.02")	0.5 mm
<b>Overall Product Thickness</b>	0.314"	8 mm
<b>Core Thickness</b>	0.256"	6.5 mm
<b>Attached Underlayment</b>	Attached Cork	
<b>Attached Underlayment Thickness</b>	0.059"	1.5 mm
<b>Finish</b>	UV Acrylic	
<b>Installation Methods</b>	Floating or Direct Glue	
<b>Profile</b>	Angle/Tap	
<b>Country of Origin</b>	Imported	

## Packaging

<b>Area per Box</b>	38.03 sq ft	4 sq m
<b>Pieces per Box</b>	16 pcs	
<b>Weight per Box</b>	63.05 lbs	28.59 kg
<b>Boxes per Pallet</b>	35 boxes	

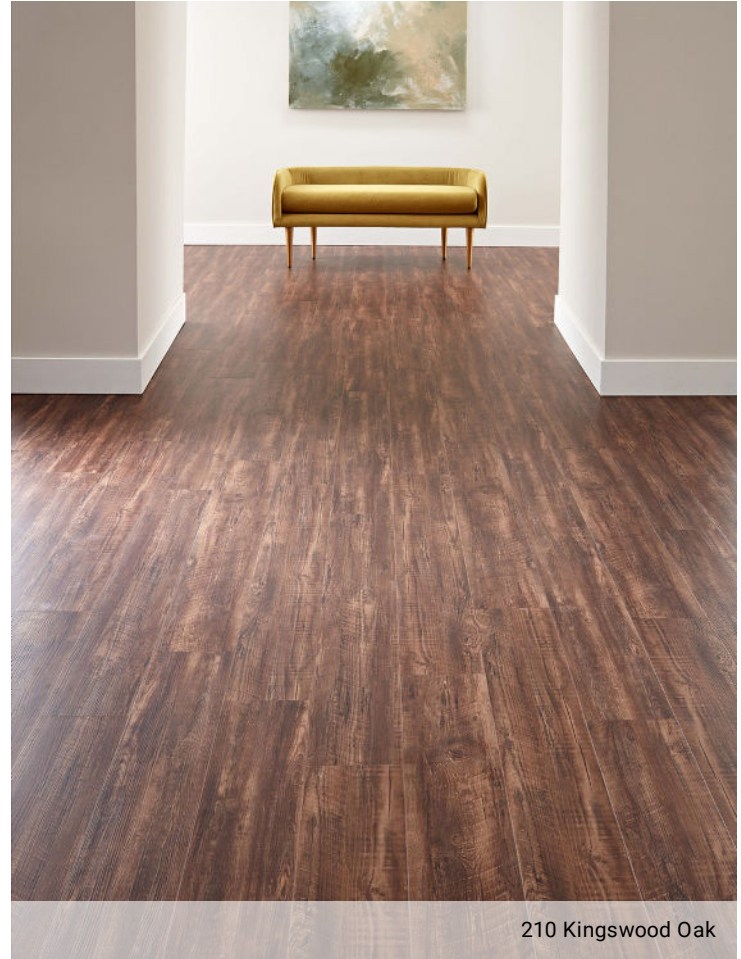


210 Kingswood Oak

## Colors


				
105 Dune	210 Kingswood Oak	211 Nantucket Oak	703 Waterfront Oak	704 Saginaw Oak
	Color Variation: V2 - Slight	Color Variation: V2 - Slight	Color Variation: V3 - Moderate	Color Variation: V2 - Slight
				
705 Ivory Coast Oak	706 Alabaster Oak	707 Blackstone Oak	708 Hudson Valley Oak	714 Marsh Oak
Color Variation: V3 - Moderate	Color Variation: V4 - Substantial	Color Variation: V4 - Substantial	Color Variation: V4 - Substantial	Color Variation: V2 - Slight

# COREtec Originals Classics VV024




715 Fidalgo Oak

Color Variation: V2 - Slight




716 Midway Oak


Color Variation: V2 - Slight




3036 Mulford Oak




5060 Stockton Oak



5076 Brixton Oak



7034 Eastwell Oak



8013 Foxbury Oak

## Performance

Static Load (ASTM F970)	Passes
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	<a href="#">ADA compliant</a>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

USF Lifetime

[Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof](#)

10 Year Light Commercial

Com Ub Bond 4100/4151

## Certifications


FloorScore Certified

GreenGuard (Certification, Gold, Private Label) Certified



# COREtec Originals Classics VV024

## Coordinating Trim




**Baby Threshold\***

BT7CT | 94"  
01V02 | 94"  
01V06 | 94"




**T-Molding\***

TM7CT | 94"  
02V24 | 94"  
02V28 | 94"




**Quarter Round**

QTRCT | 94"  
01V27 | 94"  
01V31 | 94"




**Overlap Stairnose\***

01V76 | 94"  
01V80 | 94"



**Flush Stairnose**

FS7HU | 94"  
02V01 | 94"  
02V06 | 94"



**Overlap Reducer**

01V52 | 94"  
01V56 | 94"

\*Packaged with molding track

## Coordinating Metal Trim



**Reducer**

USC20  
USC21  
USC22



**T-Mold**

USC23  
USC24  
USC25



**Stair Cap**

USC17  
USC18  
USC19

### Finish

**Satin Silver**  
**Satin Nickel**  
**Dark Bronze**

## Installation Range

Profile Size	Installation Range
3.5mm	1.5mm to 3.5mm heights
5.5mm	3.6mm to 5.5mm heights
8mm	6mm to 8mm heights

## Stair Tread



**Stair Tread**

03Z70 | 48"