

**Product Specifications**

<b>Style Number</b>	VV704
<b>Construction</b>	Waterproof Foamed Core
<b>Edge Profile</b>	Enhanced Integrated Bevel
<b>Nominal Dimensions</b>	7" wide, 48" long

	US Units	Metric Units
<b>Actual Product Width</b>	7.05"	18 cm
<b>Actual Product Length</b>	48.03"	122 cm
<b>Wear Layer Thickness</b>	20 mil (0.02")	0.5 mm
<b>Overall Product Thickness</b>	0.295"	7.5 mm
<b>Core Thickness</b>	0.197"	5 mm
<b>Attached Underlayment</b>	Attached Cork	
<b>Attached Underlayment Thickness</b>	0.039"	1 mm
<b>Finish</b>	UV Acrylic	
<b>Installation Methods</b>	Floating or Direct Glue	
<b>Profile</b>	Angle/Tap	
<b>Country of Origin</b>	Imported	


**Packaging**

<b>Area per Box</b>	18.8 sq ft	2 sq m
<b>Pieces per Box</b>	8 pcs	
<b>Weight per Box</b>	30 lbs	13.6 kg
<b>Boxes per Pallet</b>	70 boxes	



3016 Blended Umber

**Colors**

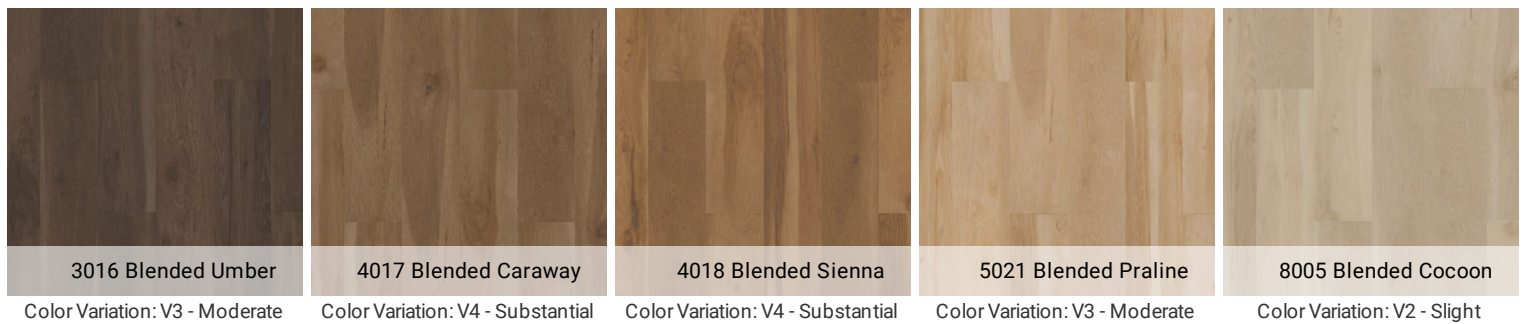

**Warranties**


USF Lifetime Limited  
[Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof](#)  
 USF 10 Year Medium Commercial

**Certifications**


GreenGuard (Certification, Gold, Private Label) Certified

# COREtec Originals Premium VV704


## Coordinating Trim




**Baby Threshold\***  
BT7CT | 94"



**T-Molding\***  
TM7CT | 94"



**Quarter Round**  
QTRCT | 94"



**Flush Stairnose**  
FS7HU | 94"

\*Packaged with molding track

## Coordinating Metal Trim



**Reducer**  
USC20  
USC21  
USC22



**T-Mold**  
USC23  
USC24  
USC25



**Stair Cap**  
USC17  
USC18  
USC19

**Finish**

- Satin Silver
- Satin Nickel
- Dark Bronze

## Installation Range

Profile Size	Installation Range
3.5mm	1.5mm to 3.5mm heights
5.5mm	3.6mm to 5.5mm heights
8mm	6mm to 8mm heights

## Stair Tread



**White Riser**  
USC02 | 48"



**Stair Tread**  
03Z70 | 48"

