

Product Specifications

Style Number	VV704
Construction	Waterproof Foamed Core
Edge Profile	Enhanced Integrated Bevel
Nominal Dimensions	7" wide, 48" long

	US Units	Metric Units
Actual Product Width	7.05"	18 cm
Actual Product Length	48.03"	122 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.295"	7.5 mm
Core Thickness	0.197"	5 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.039"	1 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	


Packaging

Area per Box	18.8 sq ft	2 sq m
Pieces per Box	8 pcs	
Weight per Box	30 lbs	13.6 kg
Boxes per Pallet	70 boxes	



3016 Blended Umber

Colors

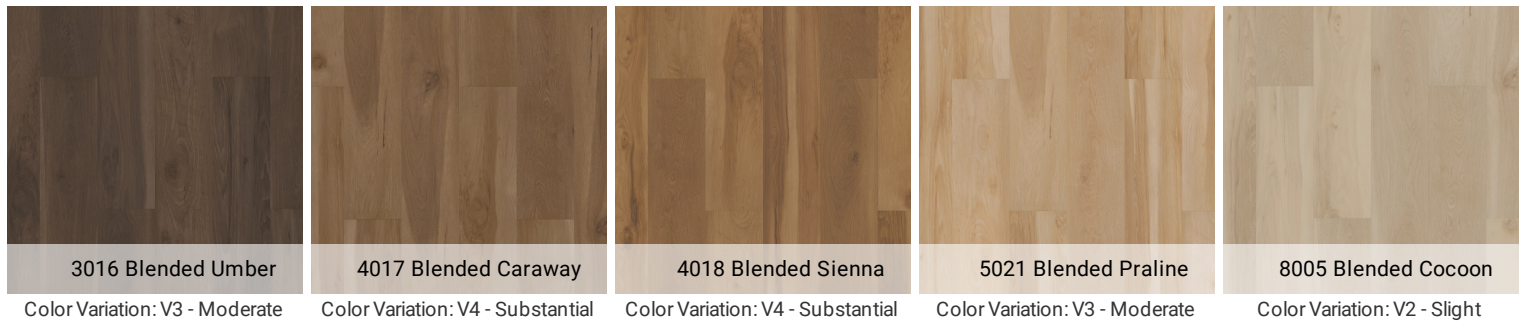

Warranties

USF Lifetime Limited
[Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof](#)
 USF 10 Year Medium Commercial

Certifications


GreenGuard (Certification, Gold, Private Label) Certified

COREtec Originals Premium VV704


Coordinating Trim




Baby Threshold*
BT7CT | 94"



T-Molding*
TM7CT | 94"



Quarter Round
QTRCT | 94"



Flush Stairnose
FS7HU | 94"

*Packaged with molding track

Coordinating Metal Trim



Reducer
USC20
USC21
USC22



T-Mold
USC23
USC24
USC25



Stair Cap
USC17
USC18
USC19

- Finish**
Satin Silver
Satin Nickel
Dark Bronze

Installation Range

Profile Size	Installation Range
3.5mm	1.5mm to 3.5mm heights
5.5mm	3.6mm to 5.5mm heights
8mm	6mm to 8mm heights

Stair Tread



White Riser
USC02 | 48"



Stair Tread
03Z70 | 48"

