

**Product Specifications**

<b>Style Number</b>	VV017	
<b>Construction</b>	Solid Polymer Core	
<b>Edge Profile</b>	Micro Bevel	
<b>Nominal Dimensions</b>	7" wide, 48" long	
	<b>US Units</b>	<b>Metric Units</b>
<b>Actual Product Width</b>	7.2"	18 cm
<b>Actual Product Length</b>	48.03"	122 cm
<b>Wear Layer Thickness</b>	20 mil (0.02")	0.5 mm
<b>Overall Product Thickness</b>	0.196"	5 mm
<b>Core Thickness</b>	0.157"	4 mm
<b>Attached Underlayment</b>	Attached Cork	
<b>Attached Underlayment Thickness</b>	0.039"	1 mm
<b>Finish</b>	UV Acrylic	
<b>Installation Methods</b>	Floating or Direct Glue	
<b>Profile</b>	Angle/Tap	
<b>Country of Origin</b>	Imported	

**Packaging**

<b>Area per Box</b>	28.84 sq ft	3 sq m
<b>Pieces per Box</b>	12 pcs	
<b>Weight per Box</b>	48.61 lbs	22.04 kg
<b>Boxes per Pallet</b>	50 boxes	




1001 Chesapeake Oak

**Colors**



# COREtec Pro Classics VV017

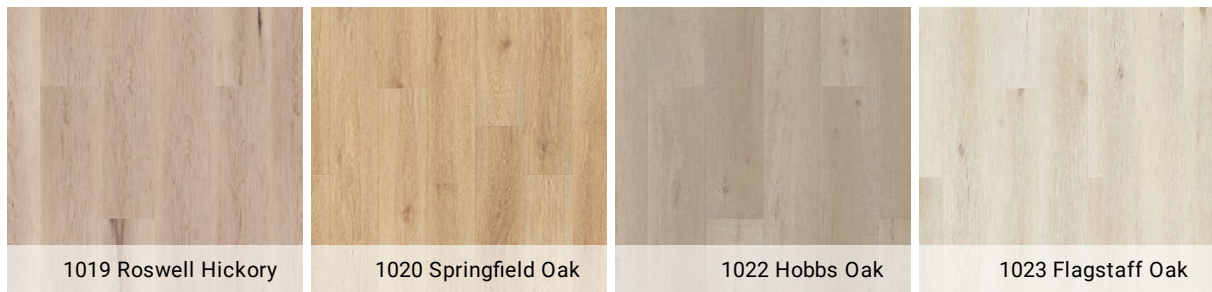

## Performance

<b>Static Load (ASTM F970)</b>	Passes (Modified), *500 lbs
<b>Residual Indentation (ASTM F1914)</b>	Passes
<b>Resistance to Heat (ASTM F1514)</b>	Passes
<b>Resistance to Light (ASTM F1515)</b>	Passes
<b>Resistance to Chemicals (ASTM F925)</b>	Passes
<b>Radiant Panel (ASTM E648)</b>	Passes, Class I
<b>Slip Resistance (ASTM D2047)</b>	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.


## Warranties

- USF Lifetime
- Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof
- USF 15 Year Heavy Commercial

## Certifications

GreenGuard (Certification, Gold, Private Label) Certified

## Coordinating Trim

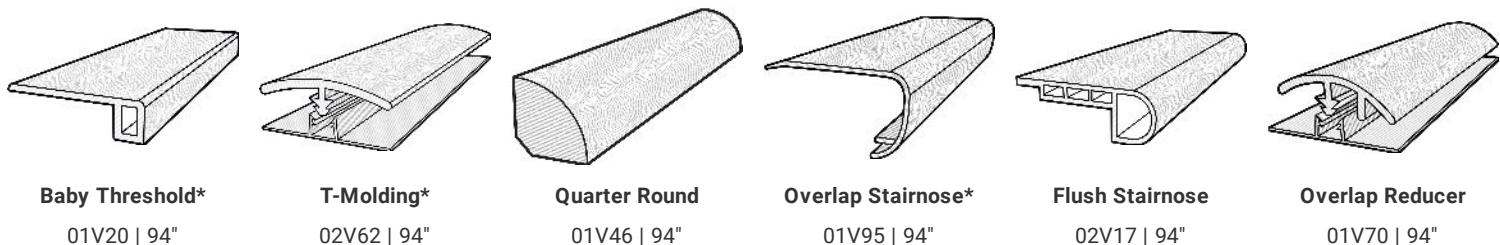

\*Packaged with molding track



# COREtec Pro Classics VV017

## Stair Tread

---



**Stair Tread**

03Z70 | 48"